



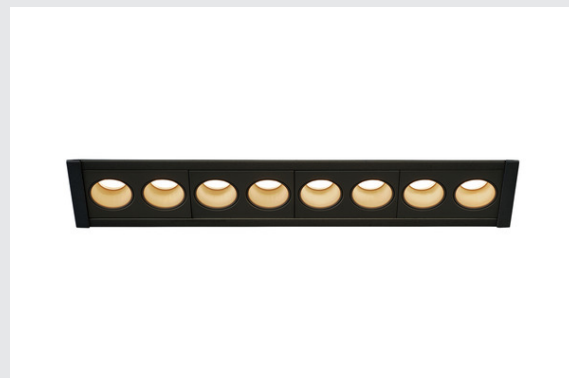

## MILANDOS 8

black recessed ceiling light, 3000K 45°

Minimalist, innovative and compact in design, the MILAN-DOS recessed ceiling light creates high-quality lighting. The true-to-life colour reproduction index of over 90 and the long LED lifespan of 60,000 hours also speak for the light. With a UGR of 16, it produces glare-free light. The simple design of the recessed ceiling light made of aluminium and polycarbonate (PC) blends seamlessly into any room. The spotlight is also quick and easy to install. When will you test out the benefits of SLV's impressive indoor lights?



## TECHNICAL DATA

|                                     |             |
|-------------------------------------|-------------|
| Item no.:                           | 1005424     |
| Secondary power / secondary voltage | 700mA       |
| Length                              | 25.6 cm     |
| Width                               | 5.6 cm      |
| Height                              | 4.3 cm      |
| Installation length                 | 25 cm       |
| Installation width                  | 4.9 cm      |
| Installation depth                  | 7 cm        |
| Net weight                          | 0.4 kg      |
| Gross weight                        | 0.428 kg    |
| IP Code                             | IP 20       |
| Safety class                        | III         |
| Impact resistance class             | IK02        |
| Assembly                            | Recessed    |
| Assembly details                    | Ceiling     |
| Lumen                               | 1040 lm     |
| Colour temperature                  | 3000 Kelvin |
| Beam angle                          | 45 °        |
| Color                               | black       |
| CRI                                 | 90          |
| UGR ≤                               | 16          |
| LXXBXX data                         | L80B50      |

## Light Source

|        |                                                                                   |
|--------|-----------------------------------------------------------------------------------|
| 916414 |  |
|--------|-----------------------------------------------------------------------------------|

## Accessories

|         |                                              |
|---------|----------------------------------------------|
| 1002423 | LED driver MEDO 300 ,<br>dimmable DALI/1-10V |
| 1006202 | LED Driver , 20W 700mA                       |

|                     |       |
|---------------------|-------|
| Ambient temperature | 30 °C |
| BIG WHITE Page      | 349   |